

This updating is for resolving the issue.

If I am talking on time slot 1 and another person starts talking on time slot 2, my receiver on time slot 1 will be muted while the other person is talking.

Base Band 3258 IC updating procedure


1. Hold pressing # key and orange alarm key, at the same time power on radio, it will display “WARNING This is Boot Mode for Sct!!!” on the screen.




2. Use the PC program cable to connect the radio to PC

3. Install the SetupSCT_PORT_v1.3.0.77.exe



4. Open the SCT_PORT.exe

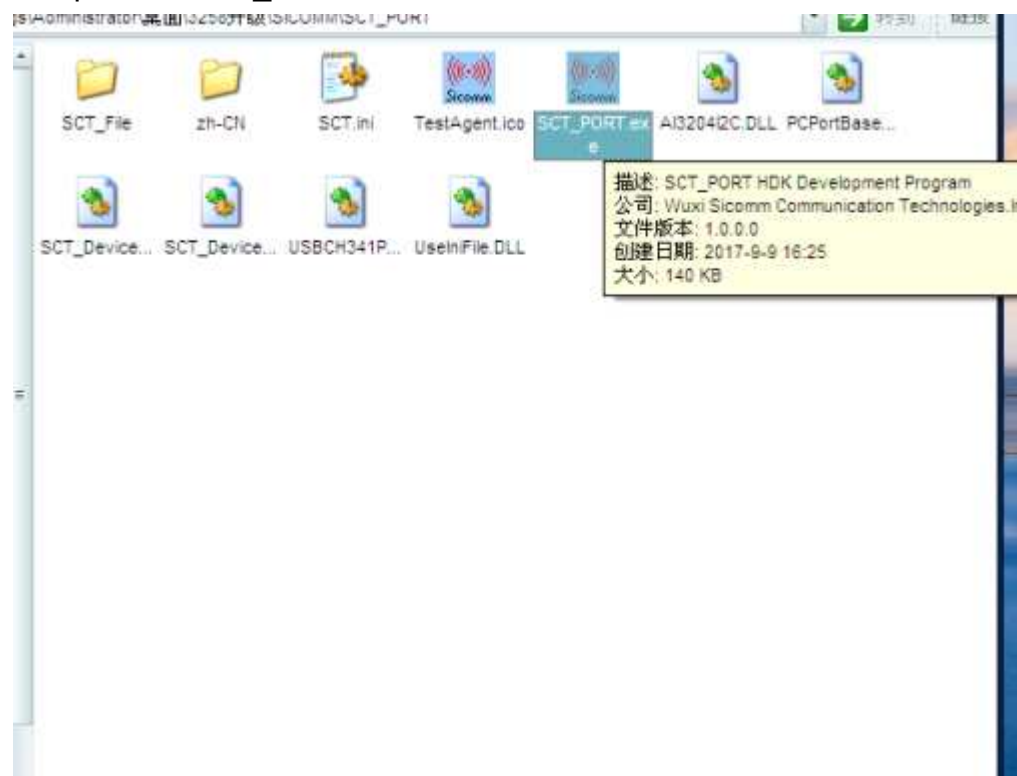


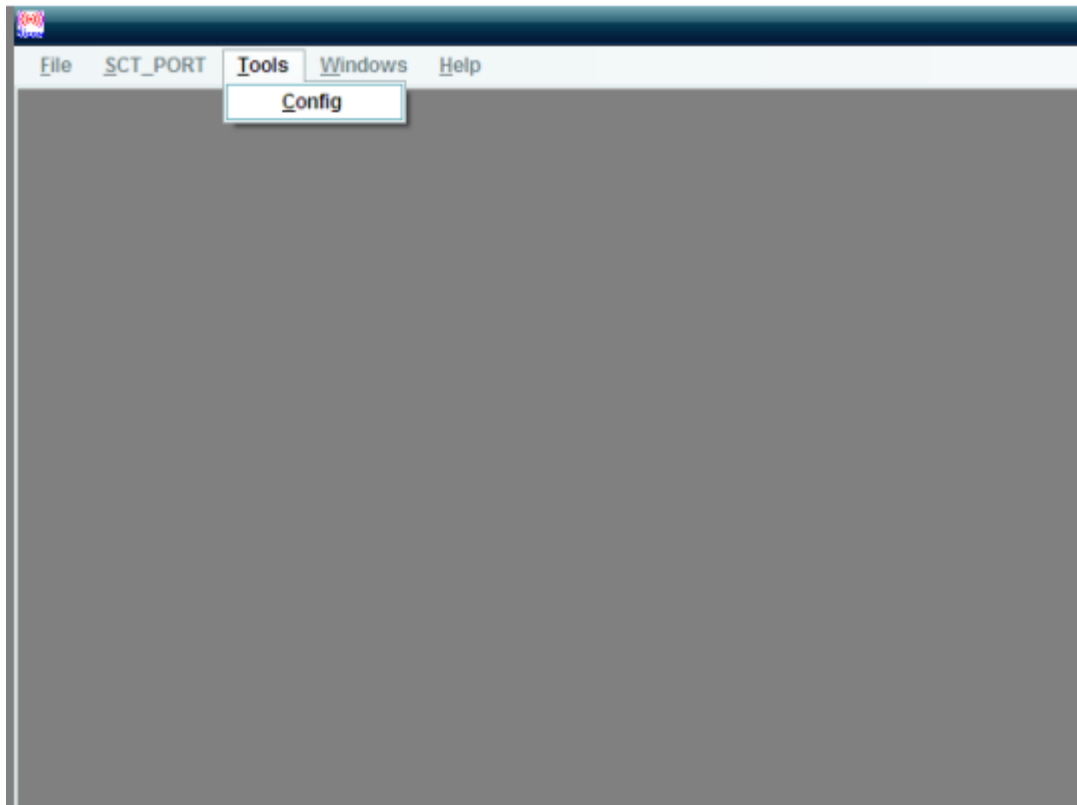




Choose the correct Port

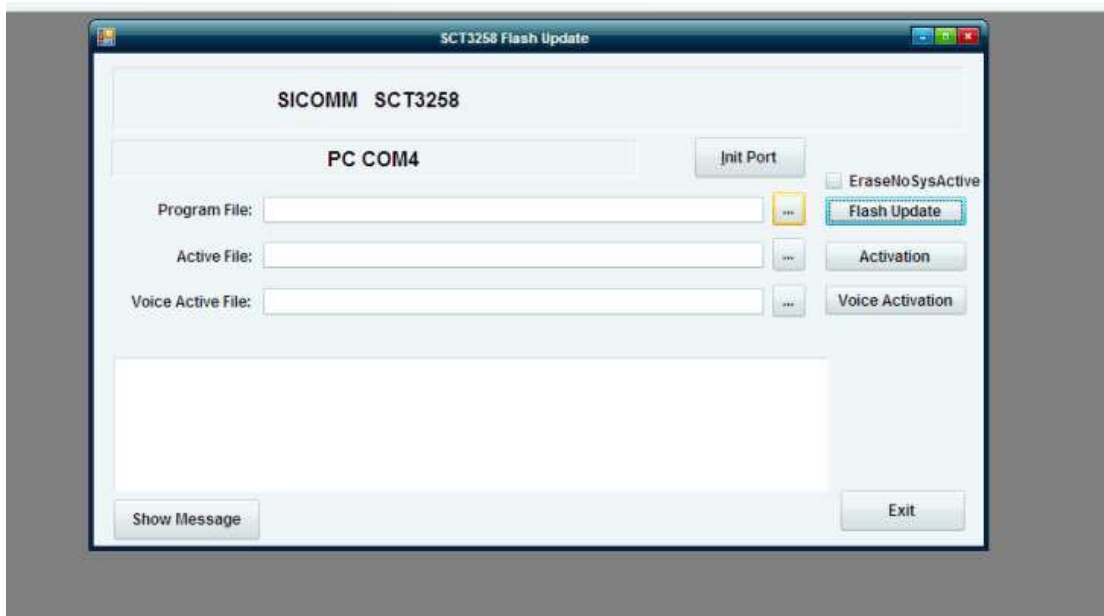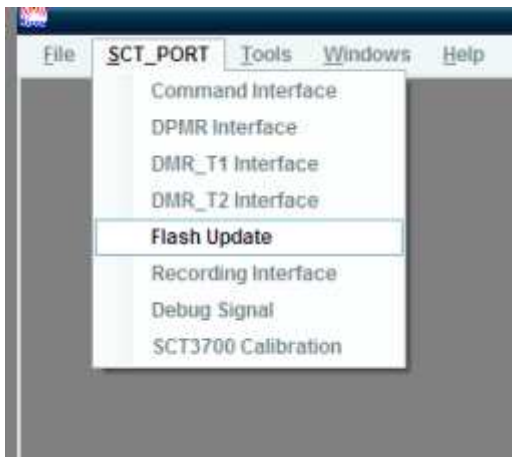


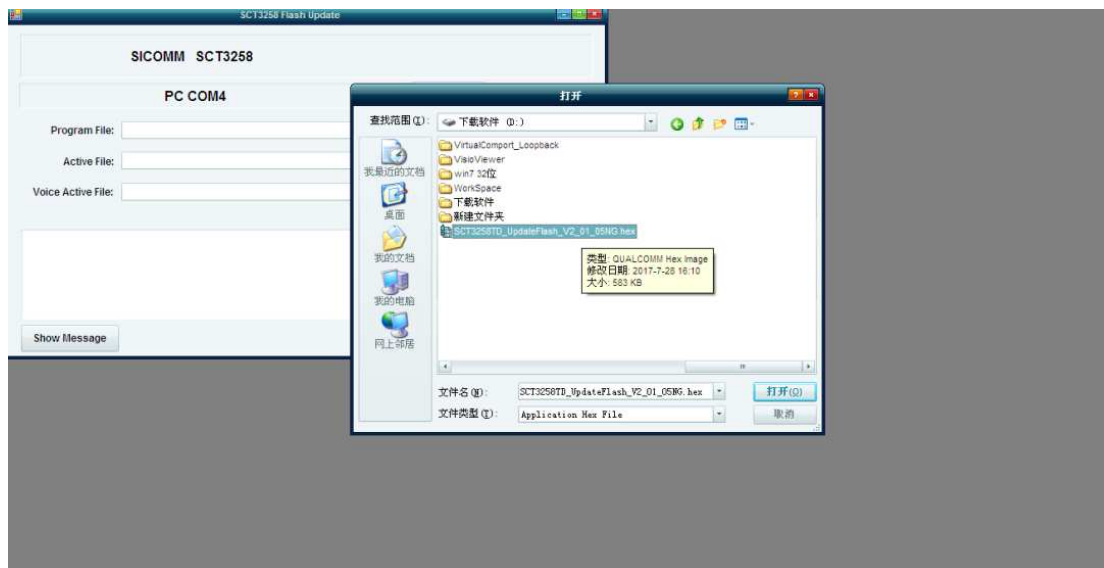


Open the SCT3258TD_UpdateFlash_v2_01_05NJ.hex file

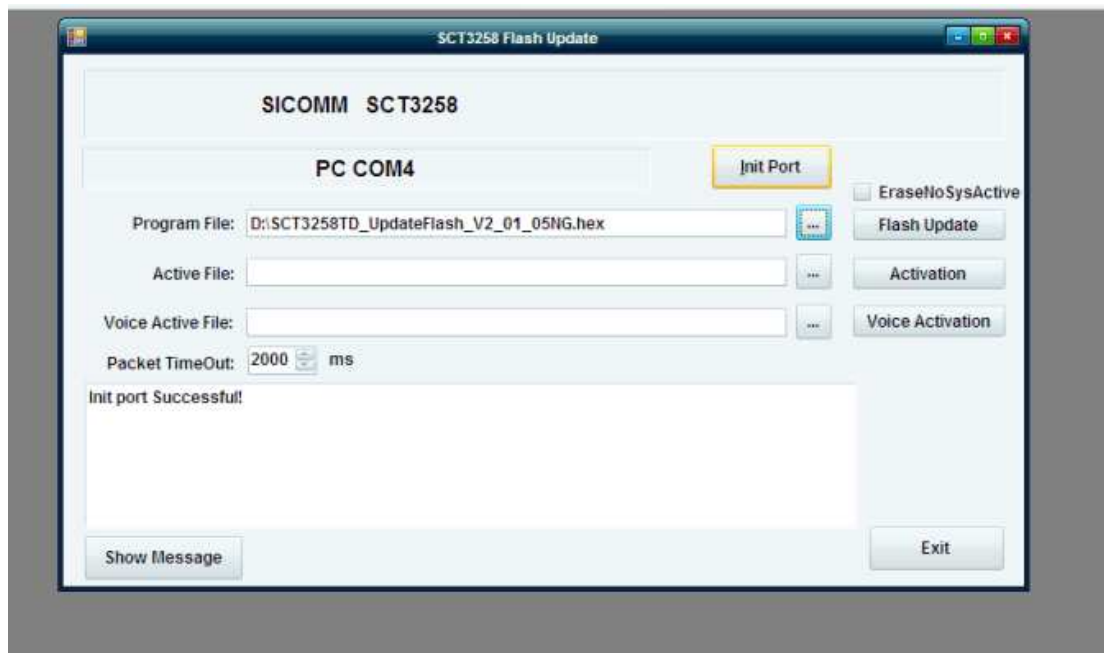

Click on INIT PORT to check the port.

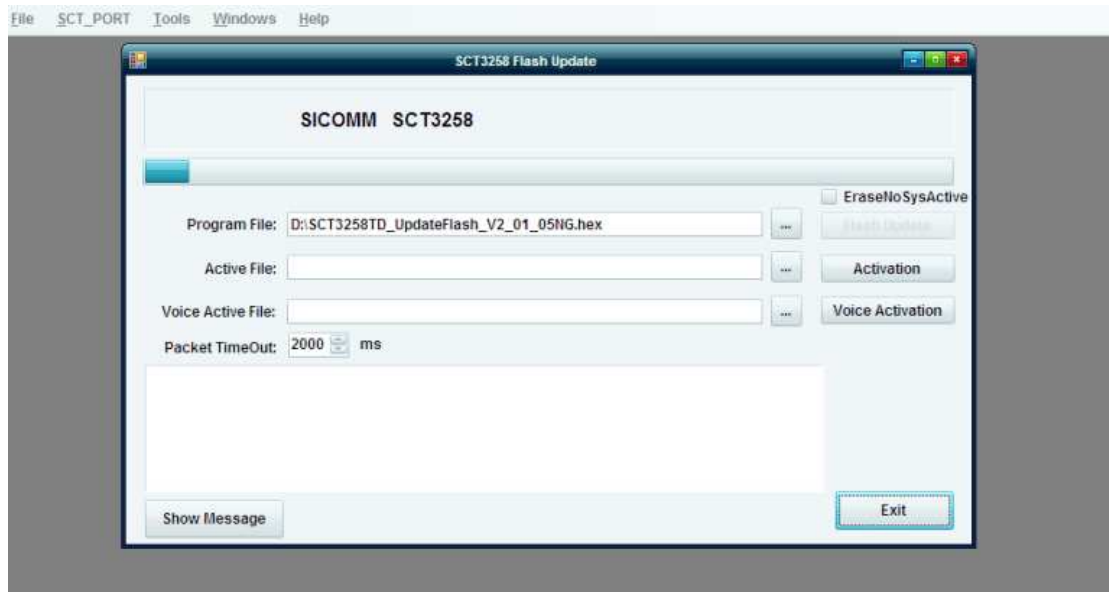

Click on Flash Update to start the updating.

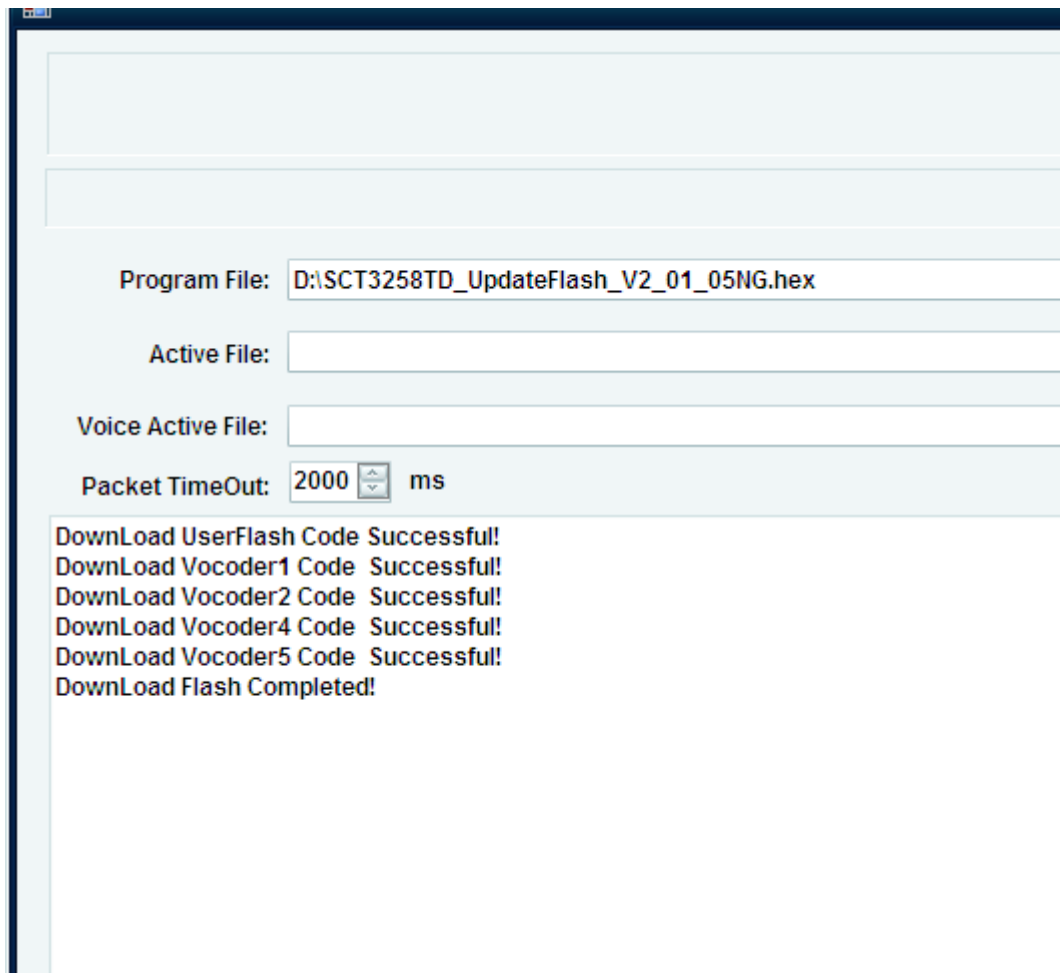

It will remind Download Flash Completed when the update is done.

Power off the radio, then re-power on, it will work normally now.