


How to Upgrade CS100/CS101 Two Way Radio

- 1) Run CFU_V1.01a.exe to install the upgrading tools.
- 2) Then run the upgrading software, such as double clicking the shortcut icon.
- 3) Choose Radio Type as CU600, set the right serial port and baud rate
- 4) Open the *.bin file, and connect the programming cable to the wanted radio
- 5) Power on the radio, and then click "E.P" (Erase, Program).

! Pay attention to keeping the cable connected stably and the radio is power on all the upgrading period.

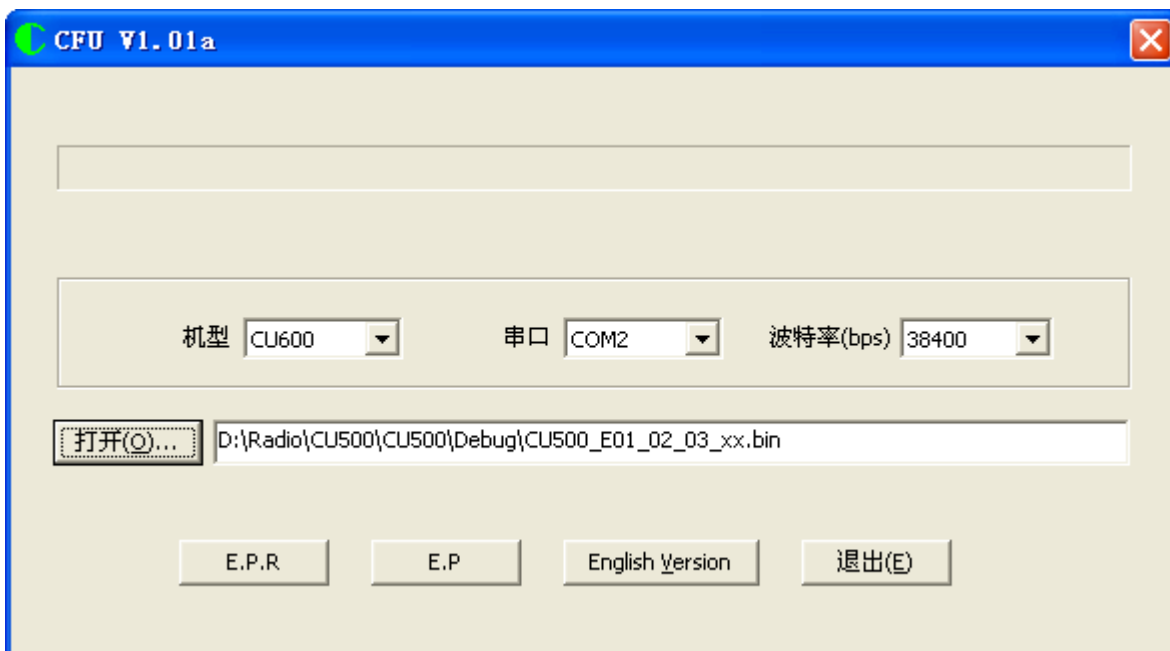

NOTE: CU500 firmware version

- 1) After reading the radio, if the firmware version starts with 'E', you should choose CU500_Exxx.bin; if starts with 'S', you should choose CU500_Sxxx.bin
- 2) After reading the radio, if the firmware is (E/S)1.1.xx or less, you should choose the bin file with xx, or none.